


- NOTES**
- 1.) UNITS MUST BE ATTACHED TO IN-PLANT COMPRESSED AIR SUPPLY FOR CLEANING MECHANISM TO FUNCTION (90 MAX PSI@ CLEAN DRY AIR)
 - 2.) WELDED STEEL CONSTRUCTION OF 12 GA. MILD STEEL.
 - 3.) FINISH: INDUSTRIAL GRADE CRIMSON RED INSIDE & OUT.
 - 4.) DUST TRAY CAPACITY: 2.0 CUBIC FT.
 - 5.) INLET PLENUM NOT SHOWN (OPTIONAL) ADDS 22 INCHES TO HEIGHT.

SPECIFICATIONS

TOTAL VALVES: 2
 TOTAL CARTRIDGES: 4
 COMPRESSED AIR 1.0 SCF @90psi per sec.

TITLE	LOW PROFILE OPTION FOR RP 4	TOLERANCES UNLESS 3 DEC. PLACES	METAL FAB
DMC NO:	L1576	SCALE	1" = 1'-0"
DATE	2-23-97	DRG. BY	JD
CHKD. BY	DMC	DATE	11
REV.	1	SH. 1 OF 3	

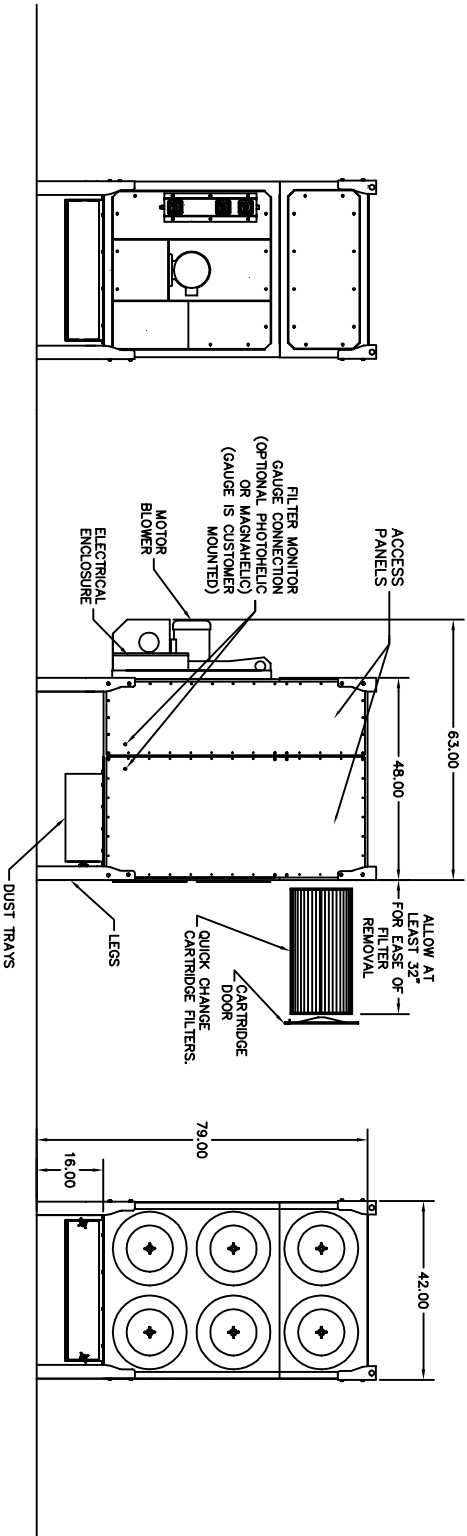


- NOTES**
- 1.) UNITS MUST BE ATTACHED TO IN-PLANT COMPRESSED AIR SUPPLY FOR CLEANING MECHANISM TO FUNCTION (90 MAX PSI CLEAN DRY AIR)
 - 2.) WELDED STEEL CONSTRUCTION OF 12 GA. MILD STEEL.
 - 3.) FINISH: INDUSTRIAL GRADE CRIMSON RED INSIDE & OUT.
 - 4.) DUST TRAY CAPACITY: 2.0 CUBIC FT.
 - 5.) INLET PLENUM NOT SHOWN (OPTIONAL) ADDS 22" TO HEIGHT.

- SPECIFICATIONS**
- TOTAL VALVES, 3
 - TOTAL CARTRIDGES, 6
 - COMPRESSED AIR 1.0 SCF @ 90PSI PER SEC

TITLE		TOLERANCES UNLESS NOTED	
LOW PROFILE OPTION FOR RP6		3 DEC. PLACE	
DMC NO: 1576		SCALE: 1/2" = 1'-0"	
DATE: 2-23-97	CHG. BY: JG	DATE: 11	SH. 2 OF 3
DRW. BY: MC		NTS	



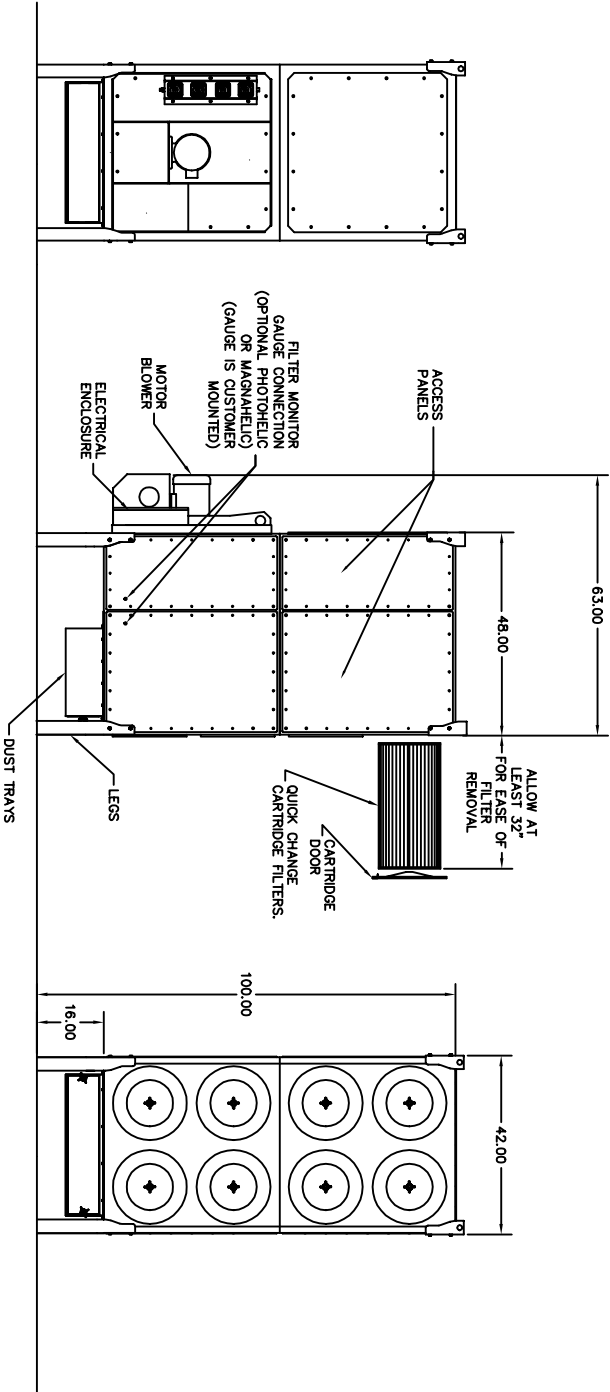

- NOTES**
- 1.) UNITS MUST BE ATTACHED TO IN-PLANT COMPRESSED AIR SUPPLY FOR CLEANING MECHANISM TO FUNCTION (90 MAX PSIG CLEAN DRY AIR)
 - 2.) WELDED STEEL CONSTRUCTION OF 12 GA. MILD STEEL.
 - 3.) FINISH: INDUSTRIAL GRADE CRIMSON RED INSIDE & OUT.
 - 4.) DUST TRAY CAPACITY: 2.0 CUBIC FT.
 - 5.) INLET PLENUM NOT SHOWN (OPTIONAL) ADDS 22" TO HEIGHT.
- SPECIFICATIONS**
- TOTAL VALVES: 4
 TOTAL CARTRIDGES: 8
 COMPRESSED AIR: 1.0 SCF @90 PSI PER SEC.

TITLE		TOLERANCES UNLESS		
LOW PROFILE OPTION FOR RP8		3 DEC. PLACE UNLESS OTHERWISE NOTED ON DRAWING		
DMC NO: MC	DATE: 2-23-97	CHG. BY: JG	CHK. BY: JG	SCALE: 1/8" = 1'-0"
				UNITS: INCHES
				SH. 3 OF 3
				DMC NO: 1576
				REV: 1