


DWG. NO:
L1573

REV.
2

REVISIONS

2 | 7-20-98 | MC
(ECR 5690)
PICTORIAL CHG.
ONLY, CHG. TO
NEW LEG DESIGN.

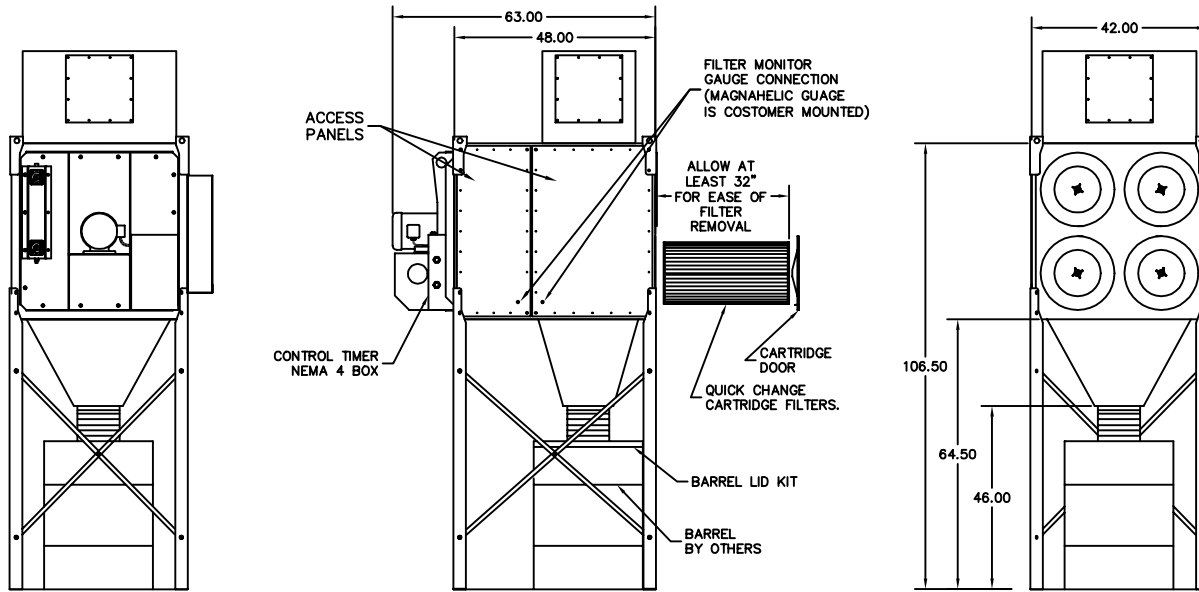

NOTES

- 1.) 5HP 460V TEFC MOTOR.
- 2.) UNITS MUST BE ATTACHED TO IN-PLANT COMPRESSED AIR SUPPLY FOR CLEANING MECHANISM TO FUNCTION (90 MAX psig CLEAN DRY AIR)
- 3.) VALVES AND CONTROL TIMER SYSTEM OPERATE ON 120v. 50-Hz. POWER.
- 4.) WELDED STEEL CONSTRUCTION OF 12 Ga. MILD STEEL.
- 5.) SOLID STATE PULSE CONTROL TIMER IN NEMA 4 ENCLOSURE FOR RPO UNITS ONLY.
- 6.) PAINTED INSIDE & OUT CRIMSON RED.
- 7.) INLET PLENUM INCLUDED.
- 8.) SUPPER BOND POLYESTER CARTRIDGES.
- 9.) MAGNEHELIC GAUGE.
- 10.) EXPLOSION VENT SUPPLIED.
- 11.) BARREL LIT KIT.
- 12.) MOTOR STARTER, OVERLOAD PROTECTOR AND START/STOP SWITCH (SUPPLIED BY OTHERS).

SPECIFICATIONS

TOTAL VALVES 2
TOTAL CARTRIDGES 4
COMPRESSED AIR 1.0 SCF @ 90 psi per sec.

TITLE RP4 DETAIL		TOLERANCES UNLESS OTHERWISE NOTED 2 DEC. PLACE ±/− .06 3 DEC. PLACE ±/− .031 ANGLES ±/− 1°		 MANUFACTURER OF PRODUCTS FOR EXPLOSION PROTECTION WICHITA, KS 67201
SCALE .13=1D	UL DWG --			
DWN BY: MC	DATE: 1-5-98	CHKD BY: JU	DWG. NO.: L1573	REV: 2
			SH.1 OF 3	