


DWG. NO:  
L1573

REV.  
2

REVISIONS

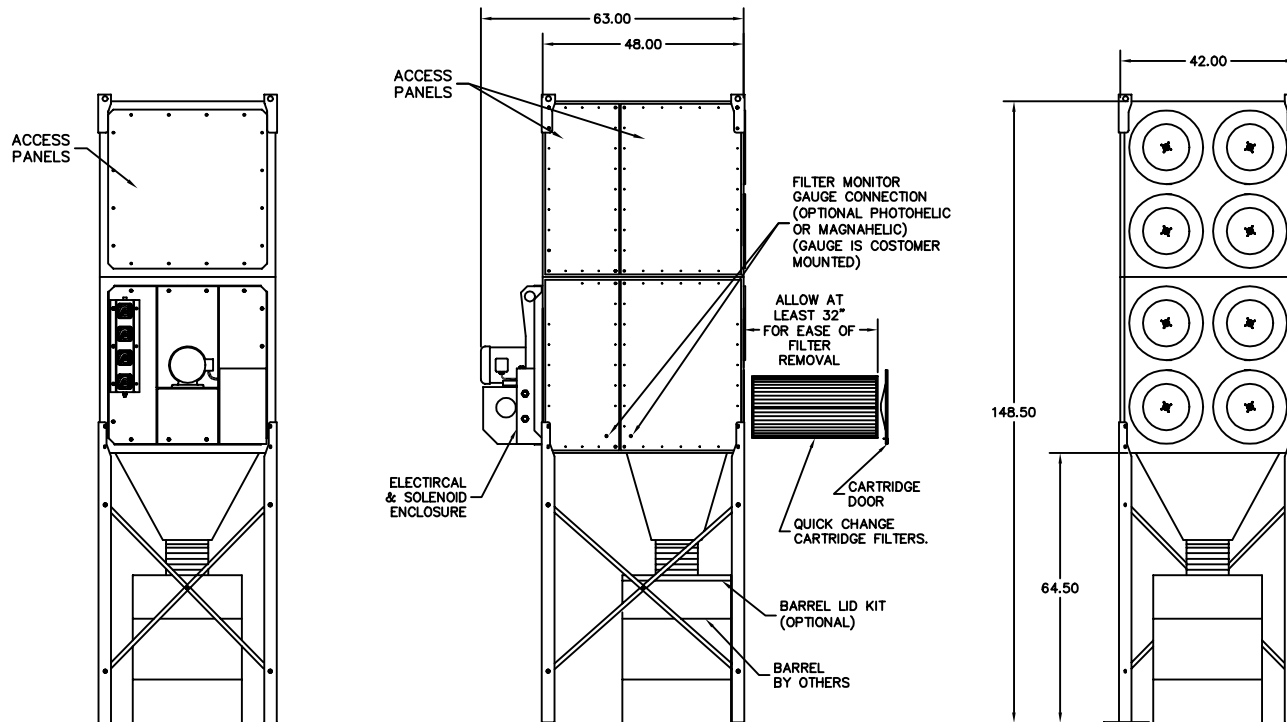

NOTES

- 1.) CONSULT MANUFACTURER REPRESENTATIVE FOR MOTOR BLOWER SPECIFICATIONS.
- 2.) UNITS MUST BE ATTACHED TO IN-PLANT COMPRESSED AIR SUPPLY FOR CLEANING MECHANISM TO FUNCTION (90 MAX psig CLEAN DRY AIR)
- 3.) VALVES AND CONTROL TIMER SYSTEM OPERATE ON 120v. 50-Hz. POWER.
- 4.) WELDED STEEL CONSTRUCTION OF 12 Ga. MILD STEEL.
- 5.) SOLID STATE PULSE CONTROL TIMER IN NEMA 4 ENCLOSURE FOR RPO UNITS ONLY.
- 6.) PAINTED INSIDE & OUT CRIMSON RED.

SPECIFICATIONS

TOTAL VALVES 4  
TOTAL CARTRIDGES 8  
COMPRESSED AIR 1.0 SCF @ 90 psi per sec.

TITLE RP8 DETAIL		TOLERANCES UNLESS OTHERWISE NOTED 2 DEC. PLACES +/- .01 3 DEC. PLACES +/- .001 ANGLES +/- 1°		 METAL FAB, INC. MANUFACTURING & PROCESSING FOR ENVIRONMENTAL PROTECTION WICHITA, KS 67201
SCALE .13=1D	DATE 1-5-98	CHKD BY JJ	DWG. NO. L1573	
DWN BY MC	DATE 1-5-98	CHKD BY JJ	DWG. NO. L1573	REV. 2
SH.3 OF 3				