


SPECIFICATIONS  
 TOTAL VALVES 2  
 TOTAL CARTRIDGES 4  
 COMPRESSED AIR 1.0 SCF @ 90 psi per sec.

- NOTES
- 1.) 5HP 460V TEFC MOTOR
  - 2.) UNITS MUST BE ATTACHED TO IN-PLANT COMPRESSED AIR SUPPLY FOR CLEANING MECHANISM TO FUNCTION (90 MAX. psig CLEAN DRY AIR)
  - 3.) VALVES AND CONTROL TIMER SYSTEM OPERATE ON 120V, 50-HZ. POWER.
  - 4.) WELDED STEEL CONSTRUCTION OF 12 GA. MILD STEEL. ENCLOSURE FOR RPO UNITS ONLY.
  - 5.) SOLID STATE PULSE CONTROL TIMER IN NEMA 4
  - 6.) PAINTED INSIDE & OUT CRIMSON RED.
  - 7.) INLET PLENUM INCLUDED.
  - 8.) SUPPER BOND POLYESTER CARTRIDGES.
  - 9.) MAGNETIC GAUGE.
  - 10.) EXPLOSION VENT SUPPLIED.
  - 11.) BARREL LIT KIT.
  - 12.) MOTOR STARTER, OVERLOAD PROTECTOR AND START/STOP SWITCH (SUPPLIED BY OTHERS).

TITLE		TOLERANCES UNLESS OTHERWISE NOTED	
RP4 DETAIL		3 DEC. PLACES UNLESS OTHERWISE NOTED	
DWG. BY	DATE	CHG. BY	DATE
MC	5-98	JJ	11
SCALE		SH. 1 OF 3	
1:3=10			
Dwg. No. L1573		REV. 2	




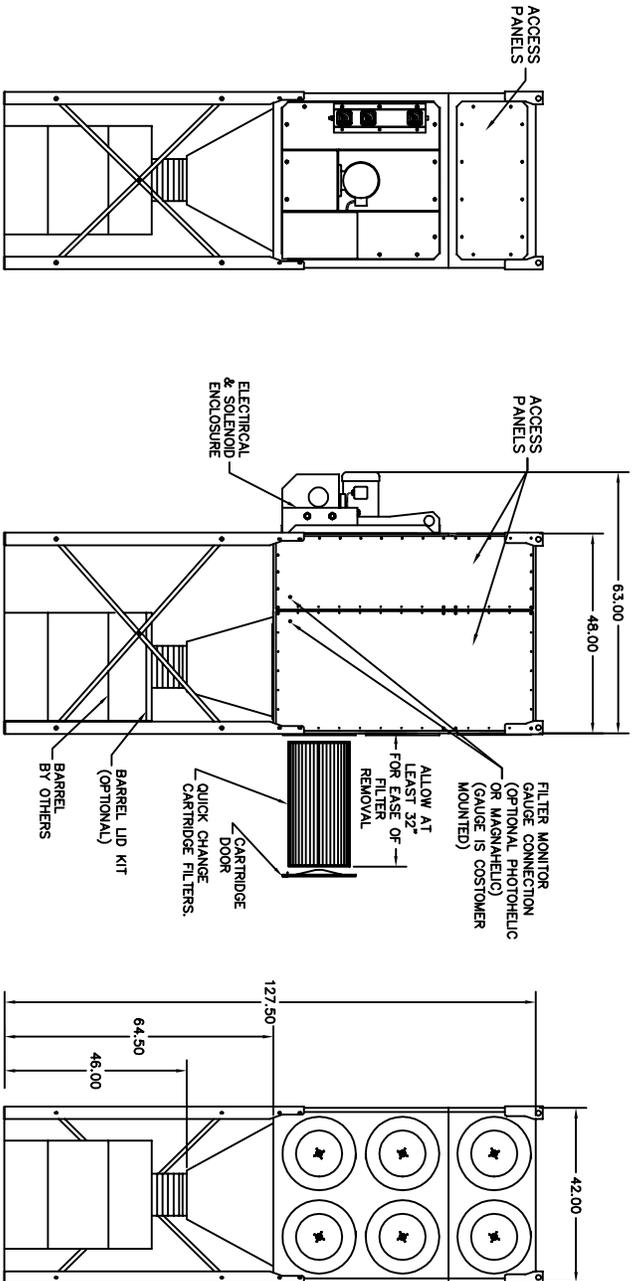

- NOTES**
- 1.) CONSULT MANUFACTURER REPRESENTATIVE FOR MOTOR BLOWER SPECIFICATIONS.
  - 2.) UNITS MUST BE ATTACHED TO IN-PLANT COMPRESSED AIR SUPPLY FOR CLEANING MECHANISM TO FUNCTION (90 MAX psig CLEAN DRY AIR)
  - 3.) VALVES AND CONTROL TIMER SYSTEM OPERATE ON 120V, 50-HZ, POWER.
  - 4.) WELDED STEEL CONSTRUCTION OF 12 GA. MILD STEEL.
  - 5.) SOLID STATE PULSE CONTROL TIMER IN NEMA 4 ENCLOSURE FOR RP6 UNITS ONLY.
  - 6.) PAINTED INSIDE & OUT CRIMSON RED.

**SPECIFICATIONS**  
 TOTAL VALVES 3  
 TOTAL CARTRIDGES 6  
 COMPRESSED AIR 1.0 SCF @ 90 psi per sec.

TITLE		TOLERANCES UNLESS NOTED	
RP6 DETAIL		3 DECIMALS IN	
DATE	CHG BY	SCALE	DRG
1-5-98	JU	.13=10	SH 2 OF 3
DMC	NO: 1573		

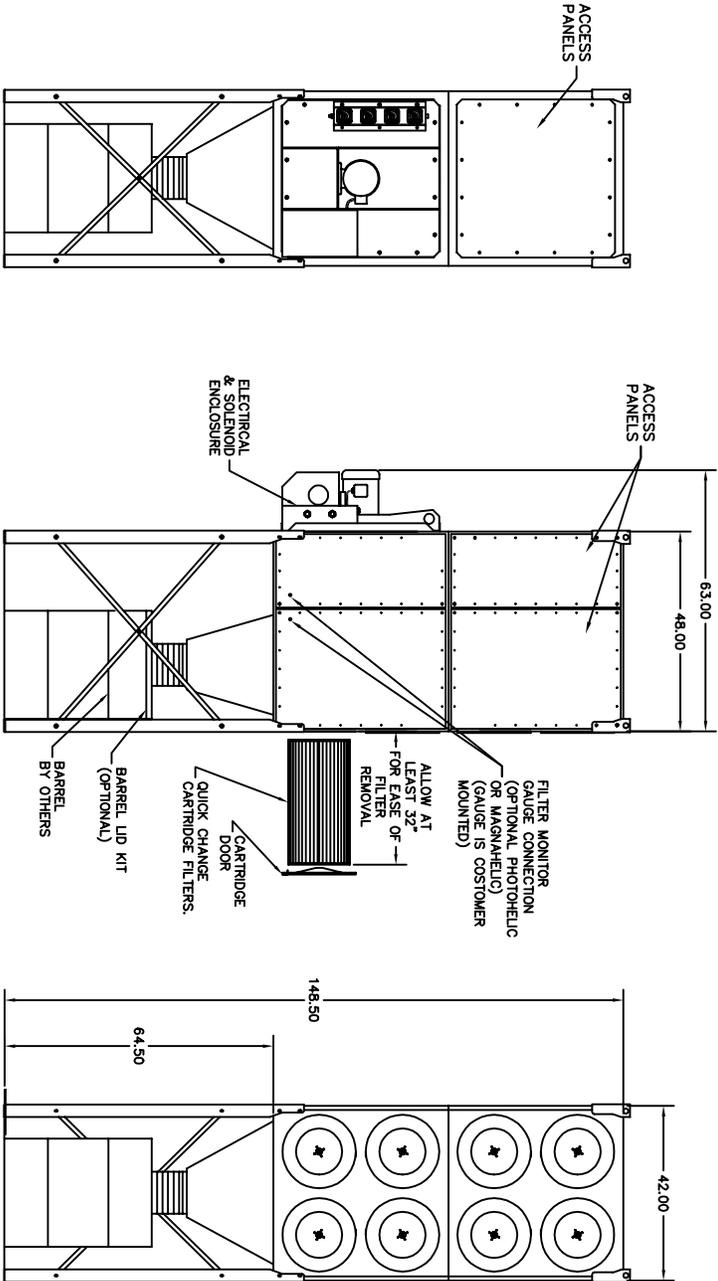


- NOTES**
- 1.) CONSULT MANUFACTURER REPRESENTATIVE FOR MOTOR BLOWER SPECIFICATIONS.
  - 2.) UNITS MUST BE ATTACHED TO IN-PLANT COMPRESSED AIR SUPPLY FOR CLEANING MECHANISM TO FUNCTION (90 MAX psig CLEAN DRY AIR)
  - 3.) VALVES AND CONTROL TIMER SYSTEM OPERATE ON 120v, 50-Hz, POWER.
  - 4.) WELDED STEEL CONSTRUCTION OF 12 GA. MILD STEEL.
  - 5.) SOLID STATE PULSE CONTROL TIMER IN NEMA 4 ENCLOSURE FOR RPO UNITS ONLY.
  - 6.) PAINTED INSIDE & OUT CRIMSON RED.

**SPECIFICATIONS**  
 TOTAL VALVES 4  
 TOTAL CARTRIDGES 8  
 COMPRESSED AIR 1.0 SCF @ 90 psi per sec.

TITLE		TOLERANCES UNLESS NOTED	
RP8 DETAIL		3 DECIMALS	
DATE	CHG BY	DATE	CHG BY
1-5-98	JU	11	SH
SCALE		SH. 3 OF 3	
1:3 = 10			
DMC NO:	REV:	DMC NO:	REV:
1573	2	1573	2



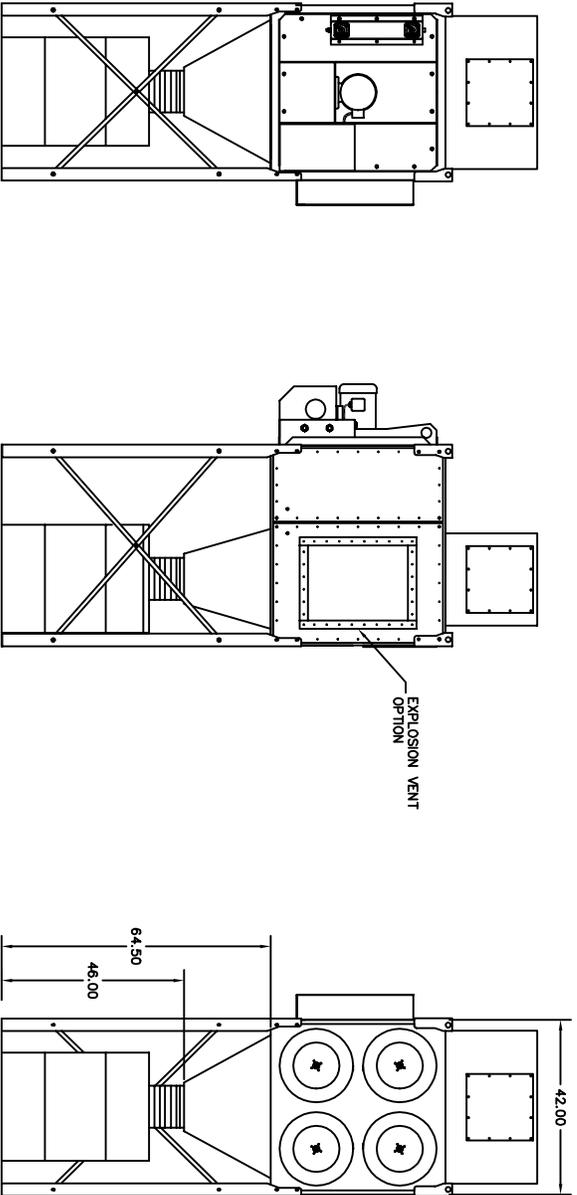

NOTES  
 1.) RP. OPTIONAL EXPLOSION VENT ASSY.  
 NOTE: VENT CAN BE LOCATED EITHER SIDE

TITLE		TOLERANCES UNLESS	
RP4 DETAIL W/EXPLOSION VENT		3 DECIMALS UNLESS OTHERWISE NOTED 3 DEC. PLACE UNLESS NOTED	
DWG. NO. 1573	DATE 11-13-98	SCALE 1:3=1D	DATE 11
CHKD. BY: JG	DRW. BY: JG	SH. 4 OF 4	