
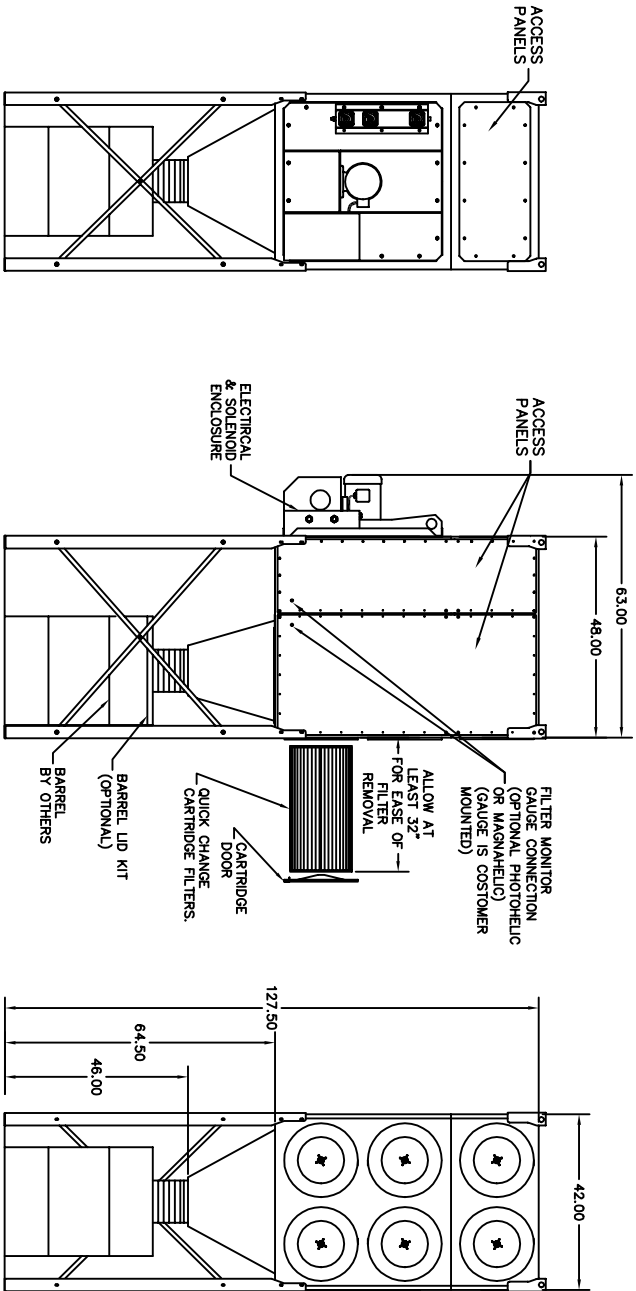


SPECIFICATIONS
 TOTAL VALVES 2
 TOTAL CARTRIDGES 4
 COMPRESSED AIR 1.0 SCF @ 90 psi per sec.

- NOTES
- 1.) 5HP 460V TEFC MOTOR
 - 2.) UNITS MUST BE ATTACHED TO IN-PLANT COMPRESSED AIR SUPPLY FOR CLEANING MECHANISM TO FUNCTION (90 MAX. psig CLEAN DRY AIR)
 - 3.) VALVES AND CONTROL TIMER SYSTEM OPERATE ON 120V, 50-HZ. POWER.
 - 4.) WELDED STEEL CONSTRUCTION OF 12 GA. MILD STEEL. ENCLOSURE FOR RPO UNITS ONLY.
 - 5.) SOLID STATE PULSE CONTROL TIMER IN NEMA 4
 - 6.) PAINTED INSIDE & OUT CRIMSON RED.
 - 7.) INLET PLENUM INCLUDED.
 - 8.) SUPPER BOND POLYESTER CARTRIDGES.
 - 9.) MAGNETIC GAUGE.
 - 10.) EXPLOSION VENT SUPPLIED.
 - 11.) BARREL LIT KIT.
 - 12.) MOTOR STARTER, OVERLOAD PROTECTOR AND START/STOP SWITCH (SUPPLIED BY OTHERS).

TITLE		TOLERANCES UNLESS OTHERWISE NOTED	
RP4 DETAIL		3 DEC. PLACES UNLESS OTHERWISE NOTED	
DWG. BY	DATE	SCALE	UNITS
MC	7-9-98	1/32"=10'	INCHES
CHD. BY	CHK. BY	SH. 1 OF 3	
JU	11		
Dwg. No. L1573		 NEW DESIGNER, INC. NEW VENTURA, CA 97928	




- NOTES**
- 1.) CONSULT MANUFACTURER REPRESENTATIVE FOR MOTOR BLOWER SPECIFICATIONS.
 - 2.) UNITS MUST BE ATTACHED TO IN-PLANT COMPRESSED AIR SUPPLY FOR CLEANING MECHANISM TO FUNCTION (90 MAX psig CLEAN DRY AIR)
 - 3.) VALVES AND CONTROL TIMER SYSTEM OPERATE ON 120V, 50-HZ, POWER.
 - 4.) WELDED STEEL CONSTRUCTION OF 12 GA. MILD STEEL.
 - 5.) SOLID STATE PULSE CONTROL TIMER IN NEMA 4 ENCLOSURE FOR RP6 UNITS ONLY.
 - 6.) PAINTED INSIDE & OUT CRIMSON RED.

- SPECIFICATIONS**
- TOTAL VALVES 3
 - TOTAL CARTRIDGES 6
 - COMPRESSED AIR 1.0 SCF @ 90 psi per sec.

TITLE		TOLERANCES UNLESS NOTED	
RP6 DETAIL		3 DECIMALS UNLESS NOTED	
DATE	DRW. BY	SCALE	DATE
1-5-98	JU	.13=10	11
CHG. BY	CHK. BY	SH. 2 OF 3	
	11		
DMC NO: 1573		REV: 2	



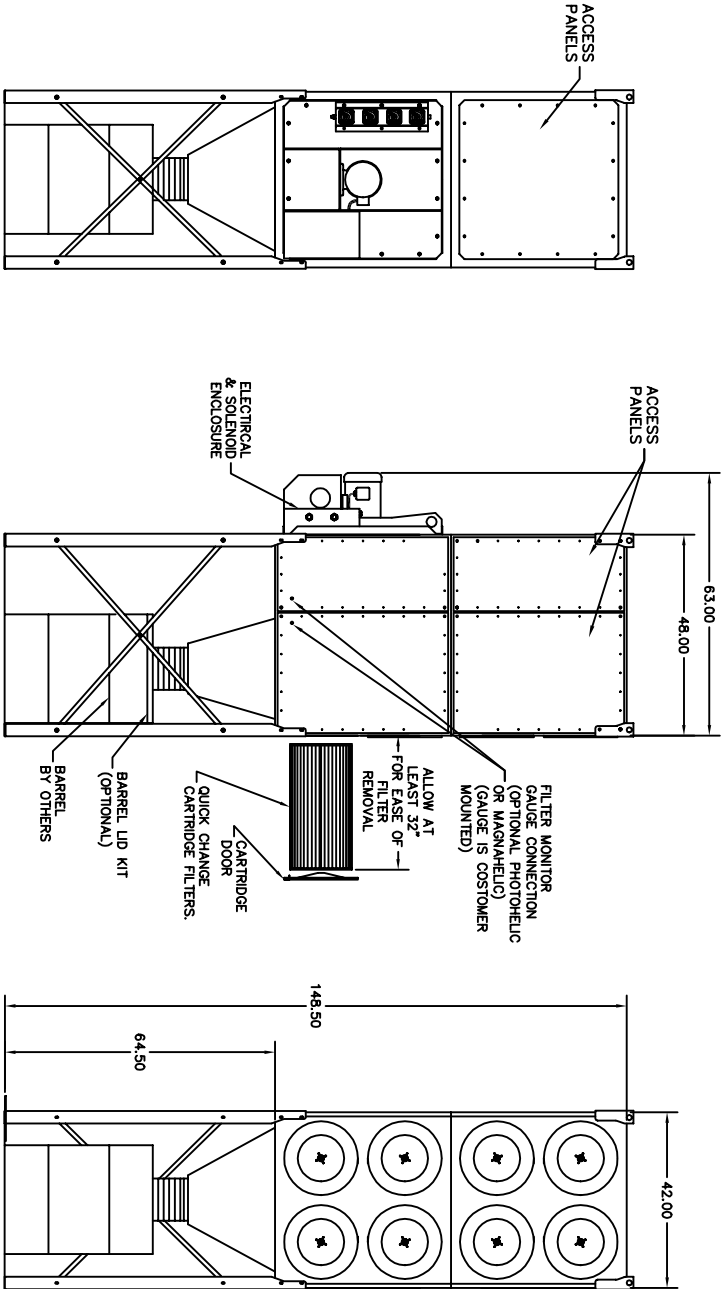


- NOTES**
- 1.) CONSULT MANUFACTURER REPRESENTATIVE FOR MOTOR BLOWER SPECIFICATIONS.
 - 2.) UNITS MUST BE ATTACHED TO IN-PLANT COMPRESSED AIR SUPPLY FOR CLEANING MECHANISM TO FUNCTION (90 MAX psig CLEAN DRY AIR)
 - 3.) VALVES AND CONTROL TIMER SYSTEM OPERATE ON 120V, 50-HZ, POWER.
 - 4.) WELDED STEEL CONSTRUCTION OF 12 GA. MILD STEEL.
 - 5.) SOLID STATE PULSE CONTROL TIMER IN NEMA 4 ENCLOSURE FOR RPO UNITS ONLY.
 - 6.) PAINTED INSIDE & OUT CRIMSON RED.

SPECIFICATIONS
 TOTAL VALVES 4
 TOTAL CARTRIDGES 8
 COMPRESSED AIR 1.0 SCF @ 90 psi per sec.

TITLE		TOLERANCES UNLESS NOTED	
RP8 DETAIL		3 DECIMALS	
DATE	CHG BY	SCALE	UNITS
1-5-98	JU	.13=10	IN
DWG NO: 1573		REV: 2	



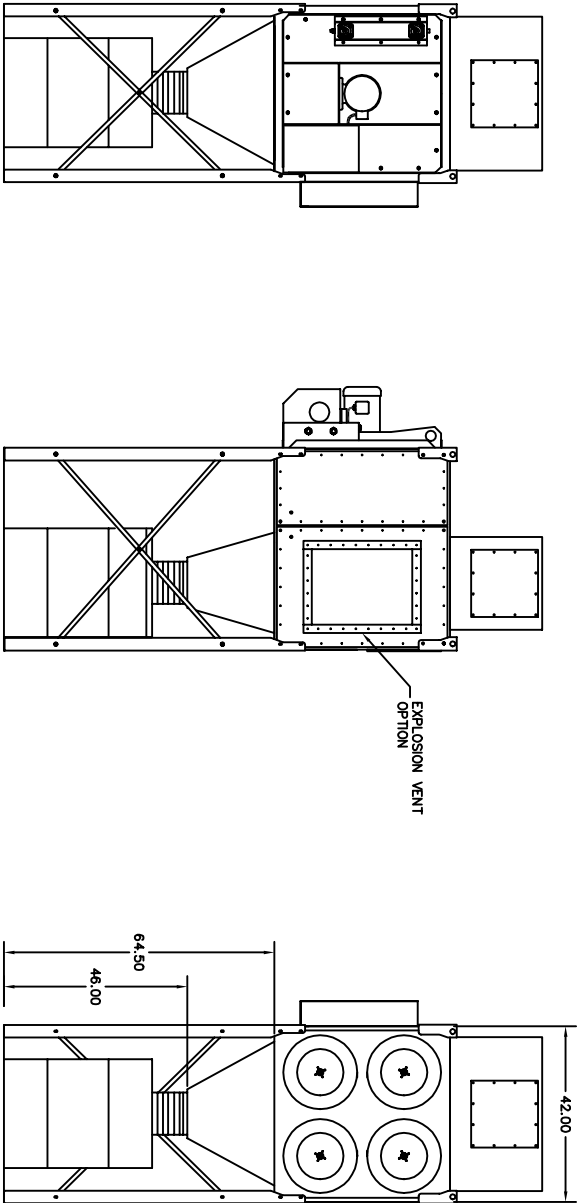

NOTES
 1.) RP. OPTIONAL EXPLOSION VENT ASSY.
 NOTE: VENT CAN BE LOCATED EITHER SIDE

TITLE		TOLERANCES UNLESS	
RP4 DETAIL W/EXPLOSION VENT		3 DECIMALS UNLESS OTHERWISE NOTED 3 DEC. PLACE UNLESS NOTED	
DWG. NO. 1573	DATE 11-13-98	SCALE 1:3=1D	DATE 11
REV. 2	CHKD. BY J.D.	SH. 4 OF 4	